


X Cotton Cloth







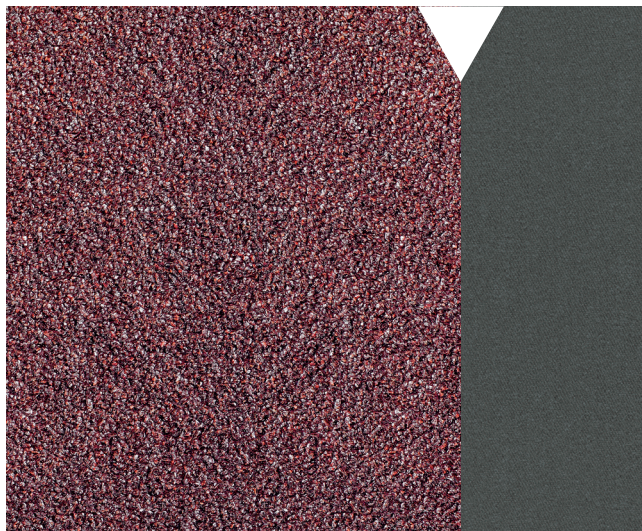


GXK51

Ideal for sanding wood, parquet, low alloy steel, stainless steel, aluminum, zamak, brass, copper, non-ferrous metals, paint, varnish, lacquer, plastic, rubber, leather, cast iron, glass, stone, granite and ceramic materials in narrow belts, rolls, velcro discs and flap wheels. Soft X cotton cloth backing with closed coated Aluminum Oxide abrasive.



| Product Code | Abrasive Grain | Backing | Coating | Jumbo Width (mm) | Grit Range |
|--------------|----------------|----------------|---------|------------------|------------|
| GXK51 | Aluminum Oxide | X Cotton Cloth | Closed | 1400 | 40 - 1000 |

| Grit Range | | | | | | | | | | | | | | | | | | | |
|------------|--|----|----|-----------|-----------|------------|------------|------------|------------|-----|------------|-----|------------|------------|-----|------------|-----|------|--|
| | | 40 | 50 | 60 | 80 | 100 | 120 | 150 | 180 | 220 | 240 | 280 | 320 | 400 | 500 | 600 | 800 | 1000 | |

| Product Forms | | | | |
|--|---|---|---|---|
|  Jumbo |  Segmented Belt (Multi Joint) |  Wide Belt |  Narrow Belt |  Roll |
|  Disc |  Velcro Disc |  Flap Wheel |  Flap Disc | |

| Application Areas | | | |
|---|-------------------------|-------------------------------------|---------------------------|
| Wood | Parquet / Floor Sanding | Low Alloy Steel | Stainless Steel / Inox |
| High Alloy Steel / Heat Resistant Steel | Aluminium / Zamak | Brass / Copper / Non Ferrous Metals | Paint / Varnish / Lacquer |
| Plastic / Rubber / Leather | Cast Iron | Glass / Stone / Granite / Ceramic | |

| Features | | |
|--------------------------|-------------------------------|--------------------------------------|
| Antistatic Feature | Suitable for Wet Applications | Friction & Heat Absorbant (Top Size) |
| Anti-Clogging (Stearate) | Flexible for Curved Surfaces | Tear Resistant |