



Company Profile

Yurt, with its 30 years of experience in Innovative Industrial Solutions, cooperates with many leading global companies in its sector.

Providing service with its innovative products in the developing industrialization and everexpanding industrial solutions market, Yurt has built all its processes on meeting the needs and expectations of its customers with high performance.

Based in Turkey, Yurt is a global player operating in many markets, primarily in Europe.

Since the founding of the company in 2010, Yurt has gained a good place in the abrasive industry by launching numerous new products.


Our Vision


To increase customer satisfaction and loyalty by offering our innovative products with superior performance and quality in the industrial solutions sector,

To become a highly preferred international brand by continuously increasing our global market share by making a difference in competitive power,

To maintain by increasing the importance and value we attach to sustainability, environmental awareness, human safety and education.



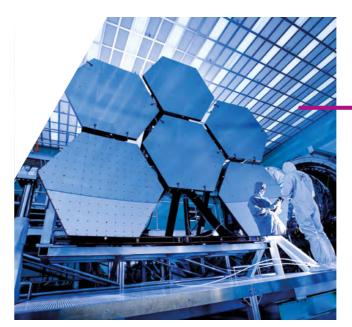

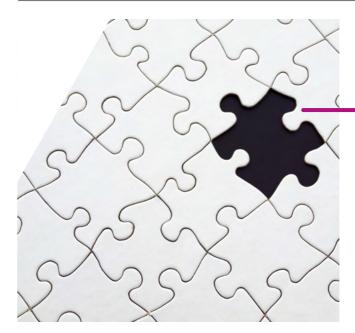

Innovative

Yurt maintains its place as leader in the sector by anticipating its customers's requirements to create innovative technologies. Finding new solutions to help customers improve their industrial processes drives the company's everyday decisions.

Industrial

Focusing on superior technology and customer support, Yurt is one of the top suppliers in the global abrasive industry. Having a worldwide network, company have operations, not only in Europe, but also in various important global bases.


Solutions


As the leader in the abrasive industry, Yurt does not only offer products to its customers, it offers solutions that are tailored to individual customer requirements. Yurt provides added value abrasive solutions generated as a result of innovative ideas that aim to revolutionise abrasive industry.

Velcro Abrasives

Yurt offers variety of light weight backing velcro abrasives that can be supplied either in jumbo roll form or in velcro disc form, mainly be used with orbital sanders in various applications.

Offering different product options, Yurt stays as one of biggest distributors in the world, supplying Velcro Abrasive for all global abrasive market.

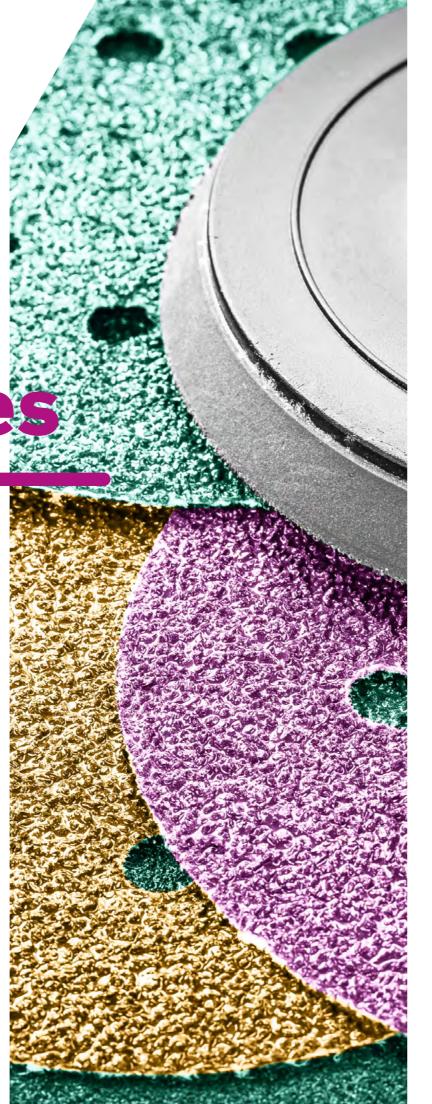

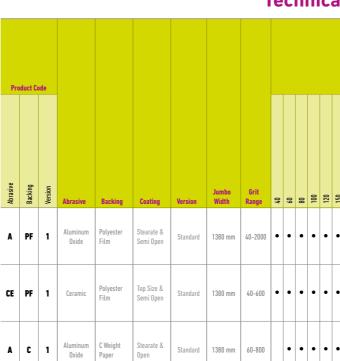

Technical Table

Grit Range											Bundlink Farmer		Application Method		Арр	licat	ion A	Irea			Feat	ures					
071	150	180	220	240	280	320	400	500	900	800	1000	1200	1500	2000	Jumbo	Velcro Disc	Orbital Sander	Wood	Low Alloy Steel	Stainless Steel / Inox	High Alloy Steel / Heat Resistant Steel	Paint / Varnish / Lacquer	Plastic / Rubber / Leather	Suitable for Wet Applications	Friction & Heat Absorbant	Anti-Clogging	Tear Resistant
	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•		•		•	•
	•	•	•	•		•	•		•						•	•	•			•	•			•	•		•
	•	•	•	•	•	•	•	•	•	•					•	•	•	•				•	•			•	_

Green Aluminum Oxide Polyester Film Backing Velcro Abrasive

Velcro Jumbo APF1-V-JB

Ideal for sanding various types of surfaces in automotive, paint, marine, wood and stainless steel sectors. Polyester film backing with semi-open coated Aluminum Oxide abrasive, also with anti-clogging Stearate coating which allows faster cutting, long lifetime and constant grinding. Ideal for sanding paint and primer in automotive industry. Suitable for dry and wet applications. Tear resistant.



Technical Data


Product Code: APF1-V-JBAbrasive: Aluminum OxideBacking: Polyester FilmCoating: Semi-Open & StearateVersion: Standard

Jumbo Width : 1380 mm App. Area Grit Range : 40, 60, 80, 100, 120, 150, 180, 220, 240, 280, 320, 400, 500, 600, 800, 1000, 1200, 1500, 2000 App. Method : Jumbo

: Automotive, Paint, Marine, Stainless Steel, Wood Sectors : Suitable for Dry and Wet Applications. Tear Resistant. Anti-Clogging Stearate Coating.

Product Code	Product Description
APF1-V-JB-40	APF1 - Green Aluminum Oxide Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 40
APF1-V-JB-60	APF1 - Green Aluminum Oxide Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 60
APF1-V-JB-80	APF1 - Green Aluminum Oxide Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 80
APF1-V-JB-100	APF1 - Green Aluminum Oxide Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 100
APF1-V-JB-120	APF1 - Green Aluminum Oxide Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 120
APF1-V-JB-150	APF1 - Green Aluminum Oxide Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 150
APF1-V-JB-180	APF1 - Green Aluminum Oxide Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 180
APF1-V-JB-220	APF1 - Green Aluminum Oxide Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 220
APF1-V-JB-240	APF1 - Green Aluminum Oxide Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 240
APF1-V-JB-280	APF1 - Green Aluminum Oxide Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 280
APF1-V-JB-320	APF1 - Green Aluminum Oxide Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 320
APF1-V-JB-400	APF1 - Green Aluminum Oxide Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 400
APF1-V-JB-500	APF1 - Green Aluminum Oxide Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 500
APF1-V-JB-600	APF1 - Green Aluminum Oxide Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 600
APF1-V-JB-800	APF1 - Green Aluminum Oxide Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 800
APF1-V-JB-1000	APF1 - Green Aluminum Oxide Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 1000
APF1-V-JB-1200	APF1 - Green Aluminum Oxide Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 1200
APF1-V-JB-1500	APF1 - Green Aluminum Oxide Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 1500
APF1-V-JB-2000	APF1 - Green Aluminum Oxide Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 2000





Technical Data

Product Code : APF1-V-D		Dimension	Dimension : Upon Request		: Automotive, Paint, Marine,
Abrasive	: Aluminum Oxide	Grit Range	: 40, 60, 80, 100, 120, 150, 180,		Stainless Steel, Wood Sectors
Backing	: Polyester Film		220, 240, 280, 320, 400, 500,	Features	: Suitable for Dry and Wet
Coating	: Semi-Open & Stearate	Arra Mathead	600, 800, 1000, 1200, 1500, 2000		Applications. Tear Resistant. Anti-Clogging Stearate Coating.
Version	: Standard	App. Method	: Orbital Sander		, and ologging oldarate couling.

Туре	Size	Grit	Product Code
	115	40	APF1-V-D-40-115-D0
	115	60	APF1-V-D-60-115-D0
	115	80	APF1-V-D-80-115-D0
	115	100	APF1-V-D-100-115-D0
	115	120	APF1-V-D-120-115-D0
	115	150	APF1-V-D-150-115-D0
	115	180	APF1-V-D-180-115-D0
	115	220	APF1-V-D-220-115-D0
	115	240	APF1-V-D-240-115-D0
	115	280	APF1-V-D-280-115-D0
	115	320	APF1-V-D-320-115-D0
	115	400	APF1-V-D-400-115-D0
	115	500	APF1-V-D-500-115-D0
	115	600	APF1-V-D-600-115-D0
	115	800	APF1-V-D-800-115-D0
	115	1000	APF1-V-D-1000-115-D0
\frown	115	1200	APF1-V-D-1200-115-D0
()	115	1500	APF1-V-D-1500-115-D0
	115	2000	APF1-V-D-2000-115-D0
\smile	125	40	APF1-V-D-40-125-D0
	125	60	APF1-V-D-60-125-D0
No Holes	125	80	APF1-V-D-80-125-D0
	125	100	APF1-V-D-100-125-D0
	125	120	APF1-V-D-120-125-D0
	125	150	APF1-V-D-150-125-D0
	125	180	APF1-V-D-180-125-D0
	125	220	APF1-V-D-220-125-D0
	125	240	APF1-V-D-240-125-D0
	125	280	APF1-V-D-280-125-D0
	125	320	APF1-V-D-320-125-D0
	125	400	APF1-V-D-400-125-D0
	125	500	APF1-V-D-500-125-D0
	125	600	APF1-V-D-600-125-D0
	125	800	APF1-V-D-800-125-D0
	125	1000	APF1-V-D-1000-125-D0
	125	1200	APF1-V-D-1200-125-D0
	125	1500	APF1-V-D-1500-125-D0
	125	2000	APF1-V-D-2000-125-D0

Green Aluminum Oxide Polyester Film Backing Velcro Abrasive

Velcro Disc APF1-V-D

Ideal for sanding various types of surfaces in automotive, paint, marine, wood and stainless steel sectors. Polyester film backing with semi-open coated Aluminum Oxide abrasive, also with anti-clogging Stearate coating which allows faster cutting, long lifetime and constant grinding. Ideal for sanding paint and primer in automotive industry. Suitable for dry and wet applications. Tear resistant. Can be produced with the required dimensions.

Туре	Size	Grit	Product Code
	150	40	APF1-V-D-40-150-D7
	150	60	APF1-V-D-60-150-D7
	150	80	APF1-V-D-80-150-D7
	150	100	APF1-V-D-100-150-D7
	150	120	APF1-V-D-120-150-D7
	150	150	APF1-V-D-150-150-D7
\frown	150	180	APF1-V-D-180-150-D7
$\langle \circ \circ \rangle$	150	220	APF1-V-D-220-150-D7
$\begin{pmatrix} \circ \circ \\ \circ \end{pmatrix}$	150	240	APF1-V-D-240-150-D7
	150	280	APF1-V-D-280-150-D7
\smile	150	320	APF1-V-D-320-150-D7
	150	400	APF1-V-D-400-150-D7
7 Holes	150	500	APF1-V-D-500-150-D7
	150	600	APF1-V-D-600-150-D7
	150	800	APF1-V-D-800-150-D7
	150	1000	APF1-V-D-1000-150-D7
	150	1200	APF1-V-D-1200-150-D7
	150	1500	APF1-V-D-1500-150-D7
	150	2000	APF1-V-D-2000-150-D7

Purple Ceramic Polyester Film Backing Velcro Abrasive

Velcro Jumbo CEPF1-V-JB

Ideal for sanding various types of surfaces in metal industries. Polyester film backing with semi-open coated Ceramic abrasive, also with friction and heat resistant special Top Size coating. Ideal for sanding stainless steel and high alloy steel materials. Suitable for dry and wet applications. Tear resistant.



App. Area

Features

Technical Data

Product Code: CEPF1-V-JBAbrasive: CeramicBacking: Polyester FilmCoating: Semi-Open & Top Size


ize Version : Standard Jumbo Width : 1380 mm Grit Range : 40, 60, 80, 220, 240, 3 App. Method : Jumbo

Width : 1380 mm nge : 40, 60, 80, 100, 120, 150, 180, 220, 240, 320, 400, 600 iethod : Jumbo : Stainless Steel and High Alloy Steel Materials : Suitable for Dry and Wet

Applications, Friction and Heat Absorbant and Tear Resistant

Product Code	Product Description
CEPF1-V-JB-40	CEPF1 - Purple Ceramic Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 40
CEPF1-V-JB-60	CEPF1 - Purple Ceramic Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 60
CEPF1-V-JB-80	CEPF1 - Purple Ceramic Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 80
CEPF1-V-JB-100	CEPF1 - Purple Ceramic Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 100
CEPF1-V-JB-120	CEPF1 - Purple Ceramic Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 120
CEPF1-V-JB-150	CEPF1 - Purple Ceramic Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 150
CEPF1-V-JB-180	CEPF1 - Purple Ceramic Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 180
CEPF1-V-JB-220	CEPF1 - Purple Ceramic Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 220
CEPF1-V-JB-240	CEPF1 - Purple Ceramic Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 240
CEPF1-V-JB-320	CEPF1 - Purple Ceramic Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 320
CEPF1-V-JB-400	CEPF1 - Purple Ceramic Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 400
CEPF1-V-JB-600	CEPF1 - Purple Ceramic Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 600





Technical Data

Teenneur	Data					
Product Cod	le : CEPF1-V-D	Version	: Standard	App. Area	: Stainless Steel and High Alloy	
Abrasive	: Ceramic	Dimension	: Upon Request		Steel Materials	
Backing	: Polyester Film	Grit Range	: 40, 60, 80, 100, 120, 150, 180,	Features	: Suitable for Dry and Wet	
Coating	: Semi-Open & Top Size		220, 240, 280, 320, 400, 600		Applications, Friction and Heat Absorbant and Tear Resistant	
		App. Method	: Orbital Sander		Absorbant and Teal Resistant	

Гуре	Size	Grit	Product Code
	115	40	CEPF1-V-D-40-115-D0
	115	60	CEPF1-V-D-60-115-D0
	115	80	CEPF1-V-D-80-115-D0
	115	100	CEPF1-V-D-100-115-D0
	115	120	CEPF1-V-D-120-115-D0
	115	150	CEPF1-V-D-150-115-D0
	115	180	CEPF1-V-D-180-115-D0
	115	220	CEPF1-V-D-220-115-D0
	115	240	CEPF1-V-D-240-115-D0
	115	320	CEPF1-V-D-320-115-D0
\frown	115	400	CEPF1-V-D-400-115-D0
()	115	600	CEPF1-V-D-600-115-D0
\smile	125	40	CEPF1-V-D-40-125-D0
No Holes	125	60	CEPF1-V-D-60-125-D0
	125	80	CEPF1-V-D-80-125-D0
	125	100	CEPF1-V-D-100-125-D0
	125	120	CEPF1-V-D-120-125-D0
	125	150	CEPF1-V-D-150-125-D0
	125	180	CEPF1-V-D-180-125-D0
	125	220	CEPF1-V-D-220-125-D0
	125	240	CEPF1-V-D-240-125-D0
	125	320	CEPF1-V-D-320-125-D0
	125	400	CEPF1-V-D-400-125-D0
	125	600	CEPF1-V-D-600-125-D0

Purple Ceramic Polyester Film Backing Velcro Abrasive

Velcro Disc CEPF1-V-D

Ideal for sanding various types of surfaces in metal industries. Polyester film backing with semi-open coated Ceramic abrasive, also with friction and heat resistant special Top Size coating. Ideal for sanding stainless steel and high alloy steel materials. Suitable for dry and wet applications. Tear resistant. Can be produced with the required dimensions.

Туре	Size	Grit	Product Code
	150	40	CEPF1-V-D-40-150-D7
	150	60	CEPF1-V-D-60-150-D7
	150	80	CEPF1-V-D-80-150-D7
	150	100	CEPF1-V-D-100-150-D7
	150	120	CEPF1-V-D-120-150-D7
	150	150	CEPF1-V-D-150-150-D7
\bigcirc	150	180	CEPF1-V-D-180-150-D7
7 Holes	150	220	CEPF1-V-D-220-150-D7
	150	240	CEPF1-V-D-240-150-D7
	150	320	CEPF1-V-D-320-150-D7
	150	400	CEPF1-V-D-400-150-D7
	150	600	CEPF1-V-D-600-150-D7

Yellow Aluminum Oxide Paper Backing Velcro Abrasive

Velcro Jumbo AC1-V-JB

Ideal for sanding undercoated, painted and varnished surfaces in wood, automotive, paint and marine sectors. C weight paper backing with open coated Aluminum Oxide abrasive, also with anti-clogging stearate coating which allows long lifetime and constant grinding.



Technical Data

Product Code: AC1-V-JBAbrasive: Aluminium OxideBacking: C Weight PaperCoating: Open & Strearate

 Version
 : Standard
 App. Meth

 Jumbo Width
 : 1380 mm
 App. Area

 Grit Range
 : 60, 80, 100, 120, 150, 180, 220, 240, 280, 320, 400, 500, 600, 800
 Features


 App. Method
 : Jumbo

 App. Area
 : Wood, Automotive, Paint, Marine Sectors

 Features
 : Anti-Clogging

Product Code	Product Description
AC1-V-JB-60	AC1 - Yellow Aluminum Oxide Paper Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 60
AC1-V-JB-80	AC1 - Yellow Aluminum Oxide Paper Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 80
AC1-V-JB-100	AC1 - Yellow Aluminum Oxide Paper Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 100
AC1-V-JB-120	AC1 - Yellow Aluminum Oxide Paper Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 120
AC1-V-JB-150	AC1 - Yellow Aluminum Oxide Paper Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 150
AC1-V-JB-180	AC1 - Yellow Aluminum Oxide Paper Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 180
AC1-V-JB-220	AC1 - Yellow Aluminum Oxide Paper Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 220
AC1-V-JB-240	AC1 - Yellow Aluminum Oxide Paper Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 240
AC1-V-JB-280	AC1 - Yellow Aluminum Oxide Paper Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 280
AC1-V-JB-320	AC1 - Yellow Aluminum Oxide Paper Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 320
AC1-V-JB-400	AC1 - Yellow Aluminum Oxide Paper Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 400
AC1-V-JB-500	AC1 - Yellow Aluminum Oxide Paper Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 500
AC1-V-JB-600	AC1 - Yellow Aluminum Oxide Paper Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 600
AC1-V-JB-800	AC1 - Yellow Aluminum Oxide Paper Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 800





Technical Data

Technical L	Jala				
Product Code	: AC1-V-D	Version	: Standard	App. Method	: Orbital Sander
Abrasive	: Aluminium Oxide	Dimension	: Upon Request	App. Area	: Wood, Automotive, Paint, Marine
Backing	: C Weight Paper	Grit Range	: 60, 80, 100, 120, 150, 180, 220,		Sectors
Coating	: Open & Strearate		240, 280, 320, 400, 500, 600, 800	Features	: Anti-Clogging

		0	Desile at Colde
уре	Size	Grit	Product Code
	150	60	AC1-V-D-60-150-D7
	150	80	AC1-V-D-80-150-D7
	150	100	AC1-V-D-100-150-D7
	150	120	AC1-V-D-120-150-D7
	150	150	AC1-V-D-150-150-D7
	150	180	AC1-V-D-180-150-D7
	150	220	AC1-V-D-220-150-D7
Ů	150	240	AC1-V-D-240-150-D7
7 Holes	150	280	AC1-V-D-280-150-D7
	150	320	AC1-V-D-320-150-D7
	150	400	AC1-V-D-400-150-D7
	150	500	AC1-V-D-500-150-D7
	150	600	AC1-V-D-600-150-D7
	150	800	AC1-V-D-800-150-D7

Yellow Aluminum Oxide Paper Backing Velcro Abrasive

Velcro Disc AC1-V-D

Ideal for sanding undercoated, painted and varnished surfaces in wood, automotive, paint and marine sectors. C weight paper backing with open coated Aluminum Oxide abrasive, also with anti-clogging Stearate coating which allows long lifetime and constant grinding. Can be produced with the required dimensions.

Innovative Industrial Solutions



Headquarters

Ikitelli OSB Mah. Isteks San. Sitesi B2 Blok No: 22 34490 Başakşehir, İstanbul / Turkiye +90 212 485 32 69 contact@yurtglobal.com Follow Us

/yurtglobal
/yurtglobal
/yurtglobal