


Y Polyester Cloth







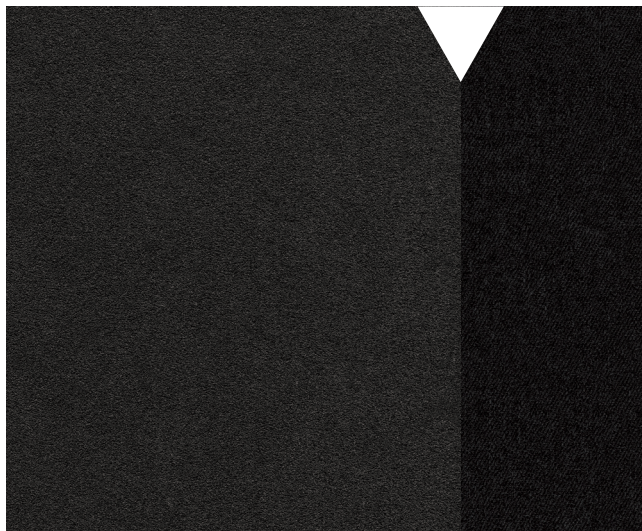


RC861

Ideal for sanding MDF, chipboard, plywood, parquet, plastic, rubber, leather, aluminum, zamak, brass, copper, non-ferrous metals, glass, stone, granite and ceramic materials in single-joint segmented belts, wide belts, narrow belts, rolls, discs and velcro discs. Antistatic Y polyester cloth backing and also antistatic closed coating Silicon Carbide abrasive which prevents dust sticking. Good surface flatness for fine applications.



Product Code	Abrasive Grain	Backing	Coating	Jumbo Width (mm)	Grit Range
RC861	Silicon Carbide	Y Polyester Cloth	Antistatic & Closed	1400	36 - 400

Grit Range																	
36	40	50	60	80	100	120	150	180	220	240	280	320	400				

Product Forms				
 Jumbo	 Segmented Belt (Multi Joint)	 Wide Belt	 Narrow Belt	 Roll
 Disc	 Velcro Disc	 Flap Wheel	 Flap Disc	

Application Areas			
Wood	Parquet / Floor Sanding	Low Alloy Steel	Stainless Steel / Inox
High Alloy Steel / Heat Resistant Steel	Aluminium / Zamak	Brass / Copper / Non Ferrous Metals	Paint / Varnish / Lacquer
Plastic / Rubber / Leather	Cast Iron	Glass / Stone / Granite / Ceramic	

Features		
Antistatic Feature	Suitable for Wet Applications	Friction & Heat Absorbant (Top Size)
Anti-Clogging (Stearate)	Flexible for Curved Surfaces	Tear Resistant